

DOMETIC SEAXCHANGE SXII SERIES WATERMAKERS



1. EASY TO USE

Integrated pressure gauges, flow meter, and control panel with backlit display



2. LESS NOISE

Vibration-isolation mounts reduce noise and vibration



3. SYLLENT MARINE BOOSTER PUMP

Extremely quiet booster pump with no shaft seals
IP68 Submersible Rating



4. EASY TO INSTALL

Easy to read plumbing connections



5. 2-IN-1 FRAME DESIGN

Install as a modular or frame system



6. FRESH WATER FLUSH

Fresh water flush standard to keep system clean
after operation and weekly when not in use

HYGIENE & SANITATION


SXII SERIES WATERMAKER SYSTEMS

For boats that require larger volumes of reliable water production, Dometic Sea Xchange SXII watermakers provide up to 2,200 GPD/8,328 LPD using reverse-osmosis technology to turn seawater into potable water.

EASY INSTALLATION
MODULAR OR COMPACT
FRAME DESIGN

DURABLE
316SS COMPONENTS

POWERFUL
UP TO 2,200 GPD/8,328 LPD
OF FRESH WATER

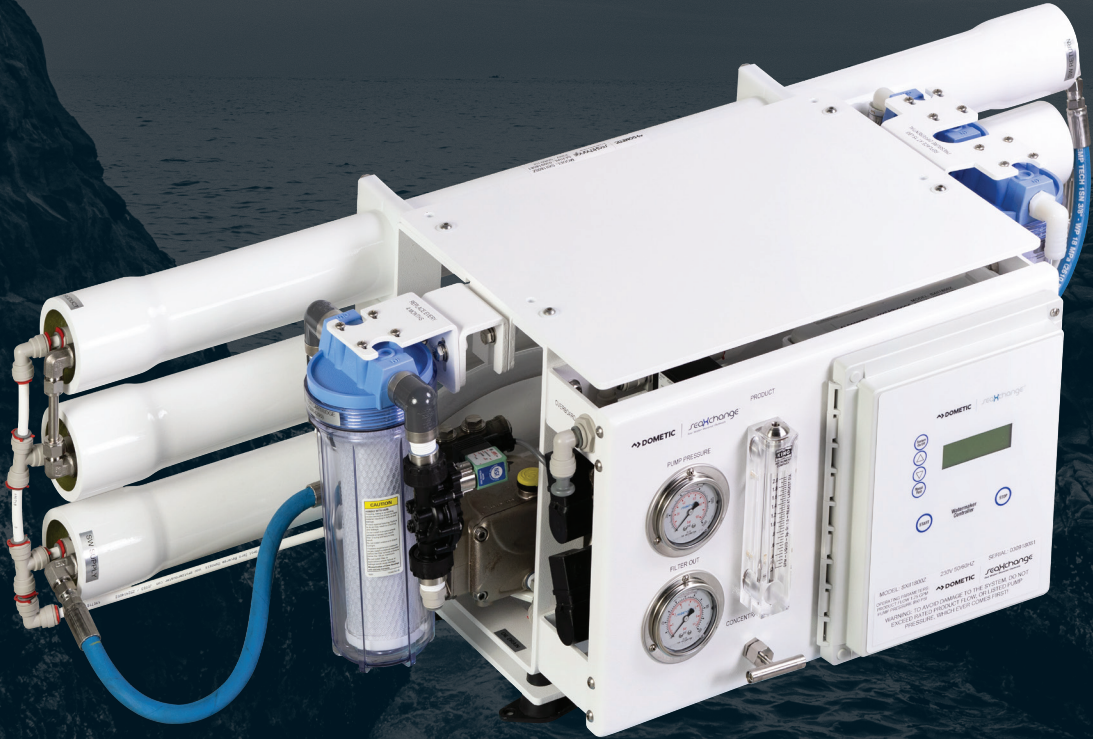

230V/60Hz
220V/50Hz



SEAWATER



STREAMLINED, COMPACT, HIGH PERFORMANCE MEETS HIGH OUTPUT



For boats that require larger volumes of reliable water production, Dometic Sea Xchange SXII water makers provide up to 2,200 GPD/8,328 LPD using reverse osmosis technology to turn seawater into potable water.

SPECIAL OPTIONS

- Remote control
- High-capacity commercial pre-filter assembly
- Filter replacement kit
- Manual TDS meter
- Vessel assembly upgrades



KEY BENEFITS

- 2-in-1 Modular or Compact Frame
- 316L Stainless Steel High-Pressure Pump
- 316L Stainless Steel Flow & Pressure Components
- TEFC Motor with Thermal Motor Protection
- Computer Controller
- LCD Backlit Display
- Automatic Freshwater Flush
- Tank Switch Input
- Digital TDS Reading
- Filmtec™ High Rejection Seawater Membranes
- Made in the U.S.A.

Model	SXII600	SXII1200	SXII1800	SXII2200
Capacity Per Day (gal/m3)	600/2.27	1200/4.54	1800/6.81	2200/8.32
Capacity Per Hour (gal/l)	25/95	50/190	75/284	90/340
Booster Pump 230/220v//60/50hz (amp)	4.10/3.10	4.10/3.10	4.10/3.10	4.10/3.10
High Pressure Pump 230/220v//60/50hz (amp)	9.9/9	9.9/9	9.9/9	9.9/9
Total Amps (230/220v//60/50hz)	14/12.1	14/12.1	14/12.1	14/12.1
Breaker Size (amp)	30	30	30	30
Membrane Quantity	1	2	3	4
Net Weight (lbs/kg)	122/55	142/64	162/74	182/83
Shipping Weight (lbs/kg)	216/98	236/107	256/116	276/125
Shipping Dimensions (H x W x L)(in/cm)	30 x 42 x 48 /76 x 107 x 122			

*Production may vary +/- 20%

SPECIAL OPTIONS



COMMERCIAL PRE-FILTRATION

No Charge with purchase of system
Part Number: 252404317



REMOTE TOUCHSCREEN DISPLAY


Part Number: 252404225





REMOTE MEMBRANE HOSE KIT

For remote mounting membrane rack
Part Number: 252404290


FRAMED COMPONENTS

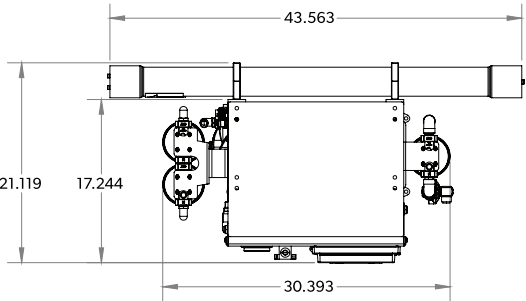


Model	Letter	Membrane Qty.
SXII600	A	1
SXII1200	B	2
SXII1800	C	3
SXII2200	D	4

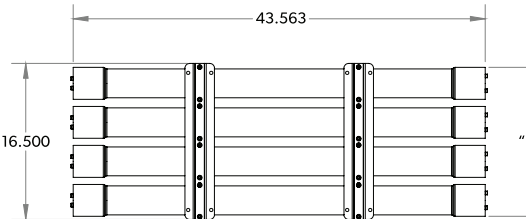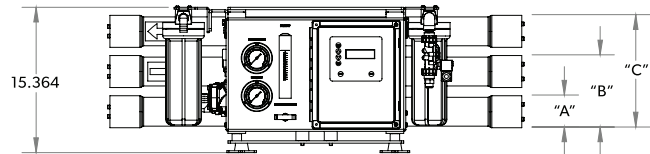

2200 GPD
MEMBRANE RACK NOT ON SYSTEM




REMOTE CONTROL (OPTIONAL)


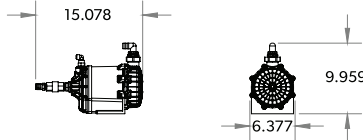


BOOSTER PUMP



MODULAR COMPONENTS

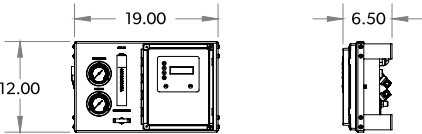


CONTROL PANEL

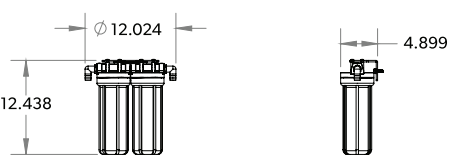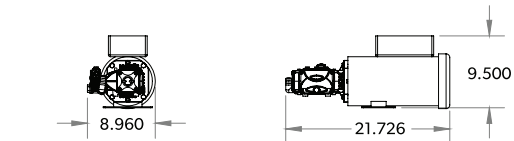

PRE FILTERS

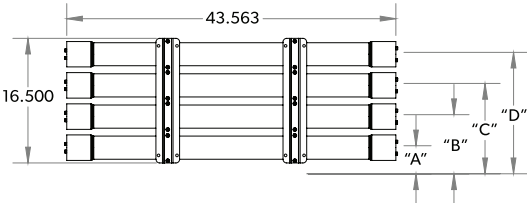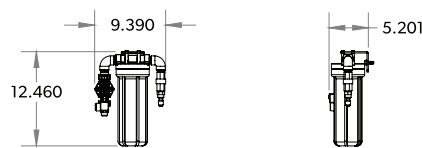

Model	Letter	Membrane Qty.
SXII600	A	1
SXII1200	B	2
SXII1800	C	3
SXII2200	D	4

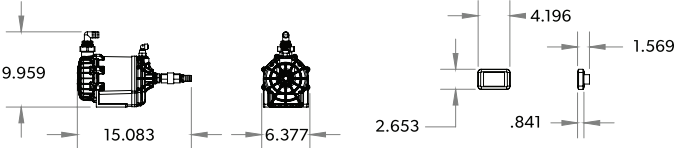

BOOSTER PUMP

REMOTE CONTROL
(OPTIONAL)

Mobile living made easy.