


# SXII SERIES WATERMAKER SYSTEMS

For boats that require larger volumes of reliable water production, Dometic SeaXchange SXII watermakers provide up to 2,200 GPD/8,328 LPD using reverse-osmosis technology to turn seawater into potable water.

**EASY INSTALLATION**  
MODULAR OR COMPACT  
FRAME DESIGN

**DURABLE**  
316SS COMPONENTS

**POWERFUL**  
UP TO 2,200 GPD/8,328 LPD  
OF FRESH WATER

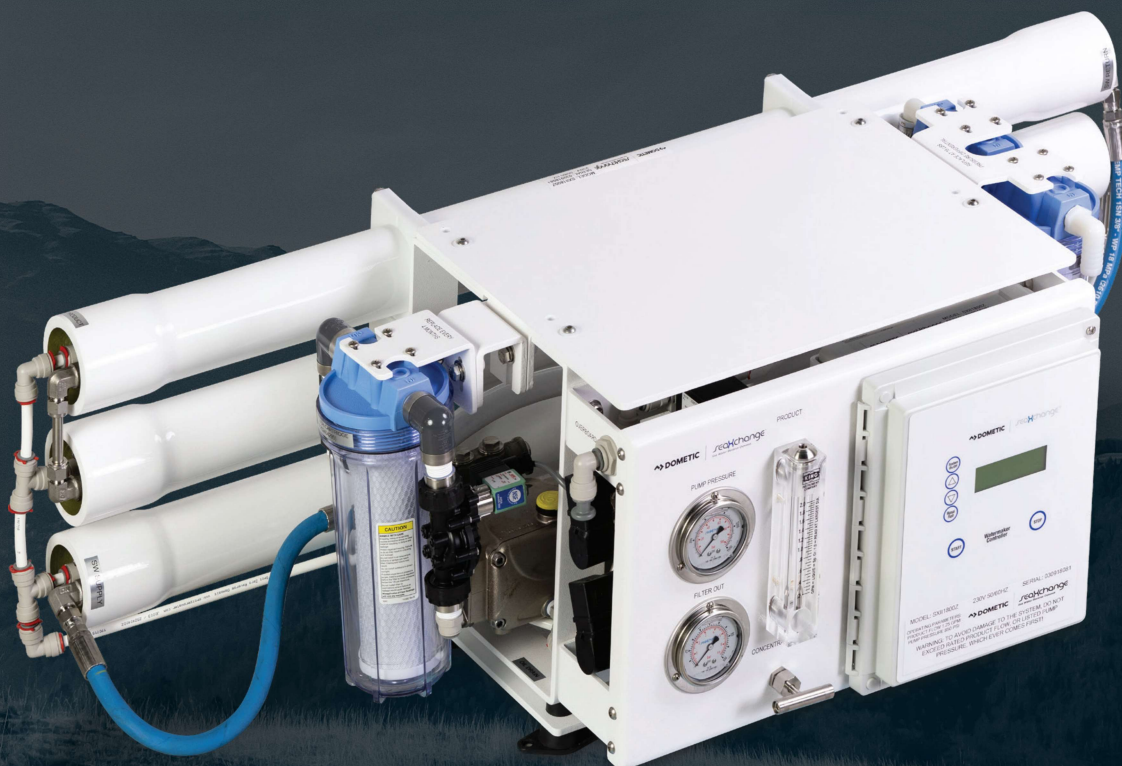


230V/60Hz  
220V/50Hz



SEAWATER

# STREAMLINED, COMPACT, HIGH PERFORMANCE MEETS HIGH OUTPUT

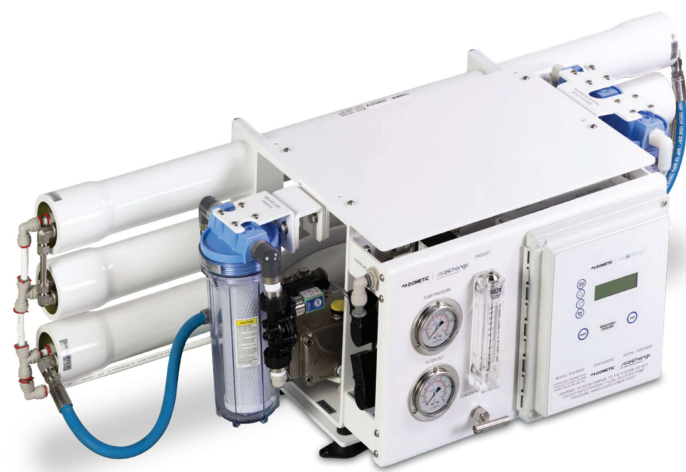


For boats that require larger volumes of reliable water production, Dometic SeaXchange SXII water makers provide up to 2,200 GPD/8,328 LPD using reverse osmosis technology to turn seawater into potable water.

### KEY BENEFITS

- 2-in-1 Modular or Compact Frame
- 316L Stainless Steel High-Pressure Pump
- 316L Stainless Steel Flow & Pressure Components
- TEFC Motor with Thermal Motor Protection
- Computer Controller
- LCD Backlit Display
- Automatic Freshwater Flush
- Tank Switch Input
- Digital TDS Reading
- Filmtec™ High Rejection Seawater Membranes
- Made in the U.S.A.

Model	SXII600	SXII1200	SXII1800	SXII2200
Capacity Per Day (gal/m3)	600/2.27	1200/4.54	1800/6.81	2200/8.32
Capacity Per Hour (gal/l)	25/95	50/190	75/284	90/340
Booster Pump 230/220v//60/50hz (amp)	4.10/3.10	4.10/3.10	4.10/3.10	4.10/3.10
High Pressure Pump 230/220v//60/50hz (amp)	9.9/9	9.9/9	9.9/9	9.9/9
Total Amps (230/220v//60/50hz)	14/12.1	14/12.1	14/12.1	14/12.1
Breaker Size (amp)	30	30	30	30
Membrane Quantity	1	2	3	4
Net Weight (lbs/kg)	122/55	142/64	162/74	182/83
Shipping Weight (lbs/kg)	216/98	236/107	256/116	276/125
Shipping Dimensions (H x W x L)(in/cm)	30 x 42 x 48 /76 x 107 x 122			

\*Production may vary +/- 20%

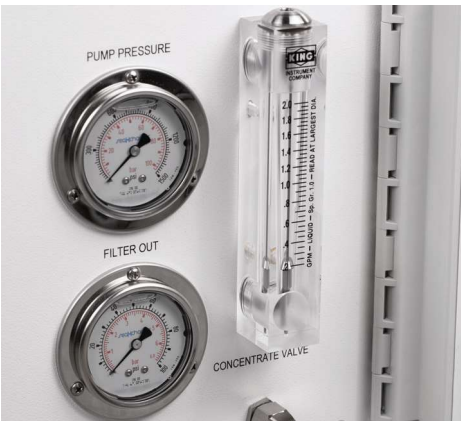

### 1. EASY TO USE

Integrated pressure gauges, flow meter, and control panel with backlit display



### 2. LESS NOISE

Vibration-isolation mounts reduce noise and vibration



### 3. EASY TO INSTALL

Easy to read plumbing connections